
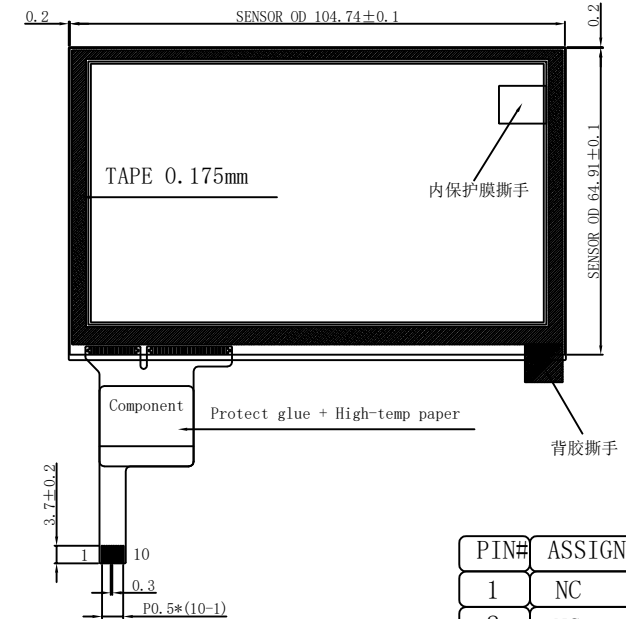


FRONT

SIDE

BACK

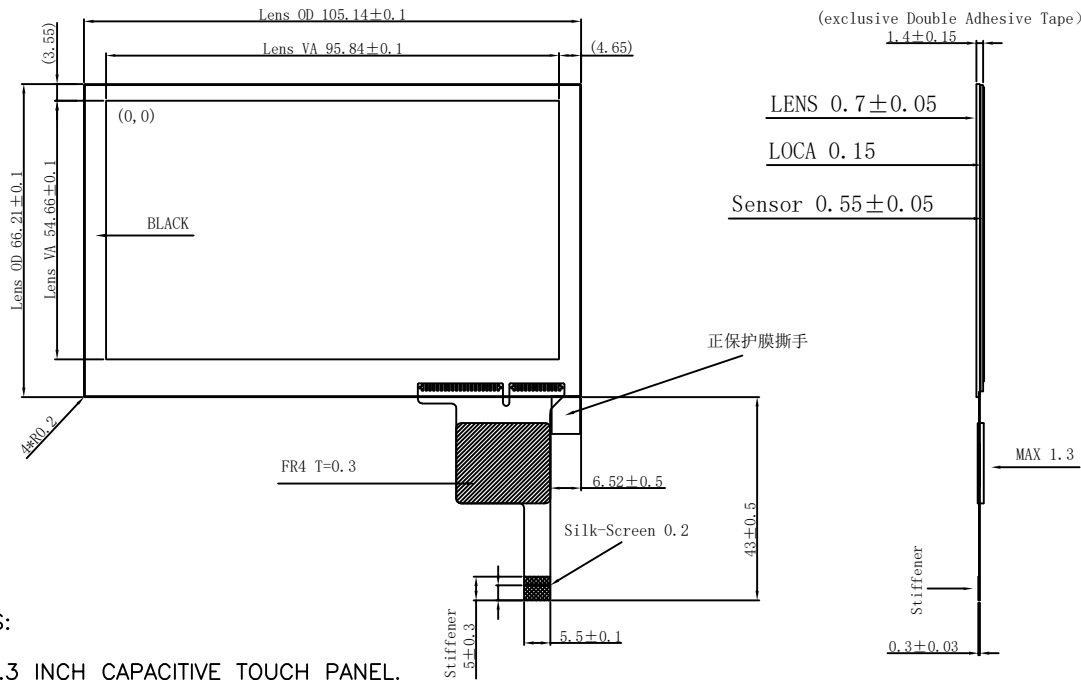

NOTES:

1. 4.3 INCH CAPACITIVE TOUCH PANEL.
2. OPERATING VOLTAGE : VDD=2.8-3.3V; IOVCC=3.3V.
3. G+G : LENS + SENSOR + FPCA.
4. RESOLUTION: 480 X 272 DOTS.
5. CTP DRIVER: EETI EXC3146
6. MULTI FINGER: UP TO 5.
7. HARDNESS OF COVER SURFACE : 6H.
8. TRANSMITTANCE : $\geq 83\%$.
9. OPERATING TEMP : -10°C TO +60°C.
10. STORAGE TEMP : -20°C TO +70°C.
11. GENERAL TOLERANCE : ± 0.2 .
12. RoHS COMPLIANT.

PIN#	ASSIGNMENT
1	NC
2	NC
3	RST
4	GND
5	INT
6	SDA
7	SCL
8	GND
9	GND
10	VDD

DRAWN ME.CHECKED EE.CHECKED APPROVED	CL 2106.12.16	TITLE MODULE SPEC.	DRAWING NO. CTP-T430GF-04			
	CUSTOMER'S APPROVAL		UNIT	mm	SCALE	FIT
			3rd Angle		SHEET 1 OF 1	
Victronix Tecenstar INT'L Co., LTD		VER. SYMBOL AMENDMENT SIGN DATE				
		00				