
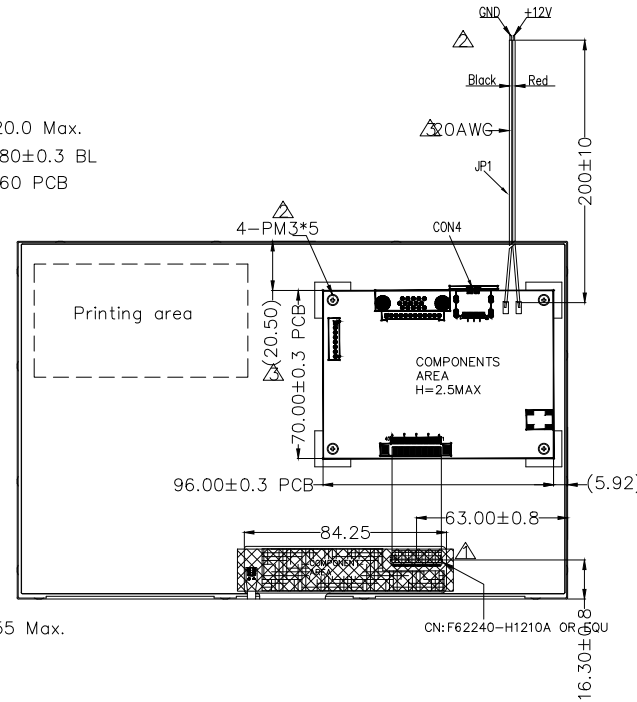
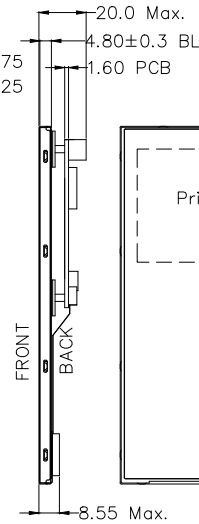


RoHS

REVISE	Revision note	DATE	NAME
V00	First	2023.08.18	solon
V01	Update yellow tape.	2023.09.02	solon
V02	Update PCB & Add 3M VHB.	2023.10.14	solon
V03	Update place of PCB.	2023.10.17	solon

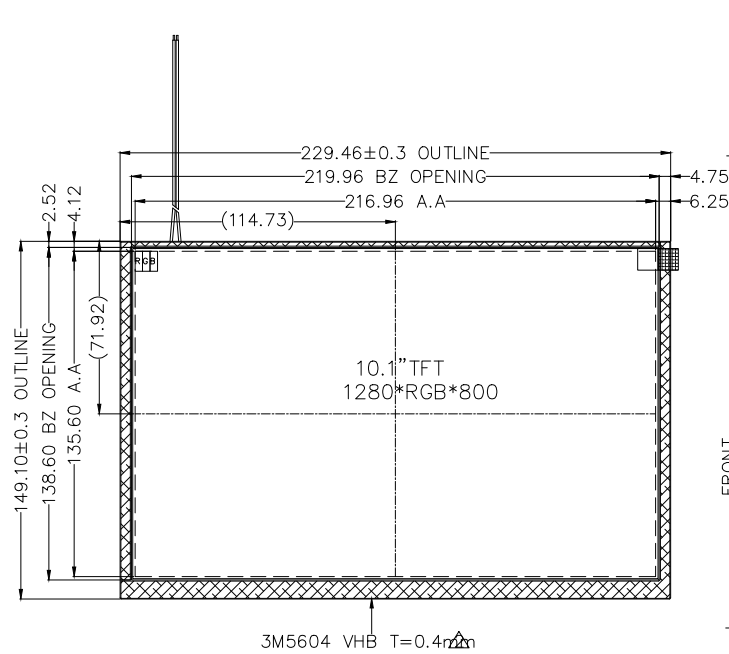

Pin No.	Symbol
1	+12V
2	GND

CON4:HDMIFEMAL19PIN
S.M.T.ATYPE


1	TMDS Data 2+
2	TMDS Data2 Shield
3	TMDS Data 2-
4	TMDS Data 1+
5	TMDS Data1 Shield
6	TMDS Data 1-
7	TMDS Data 0+
8	TMDS Data 0 Shield
9	TMDS Data 0-
10	TMDS Clock+
11	TMDS Clock Shield
12	TMDS Clock-
13	CEC
14	NC
15	SCL
16	SDA
17	DDC/CEC GND
18	VDD
19	Hot Plug Detect

Note:

- DISPLAY TYPE: 10.1TFT, Normally black ;
- VIEWING DIRECTION : U/L/D/R 85/85/85/85 ;
- TFT Driver IC : EK79202 ;
- Top : -30°C ~ 85°C, Tst : -30°C ~ 85°C ;
- LCM Luminance: LED/1000cd/m (Typical)
- Modify the marker, with * accent size, with () as the reference size ;
- Meets RoHS standards

注:FFC 要插上LCM 连接器
后再贴黄胶

LED CIRCUIT DIAGRAM:



IF=360mA ; VF=19.6~22.4V

Victronix Tecenstar Co.,LTD

Approved By		SIZE: 10.1inch TFT with CTP
Checked By		DWARING_NO.: VXT101HIEWA-03-B
Drawn By	solon	CUSTOMER_NO.
UNIT:mm		